




[www.prosurfaces.net](http://www.prosurfaces.net)

T 603 8023 3212

F 603 8023 2449

E [info@prosurfaces.net](mailto:info@prosurfaces.net)

Professional Surfaces Sdn Bhd  
Lot 540 Sub-Lot A-12, Jalan Subang 2  
Sungai Penaga Industrial Park  
47500 Subang Jaya, Selangor  
Malaysia

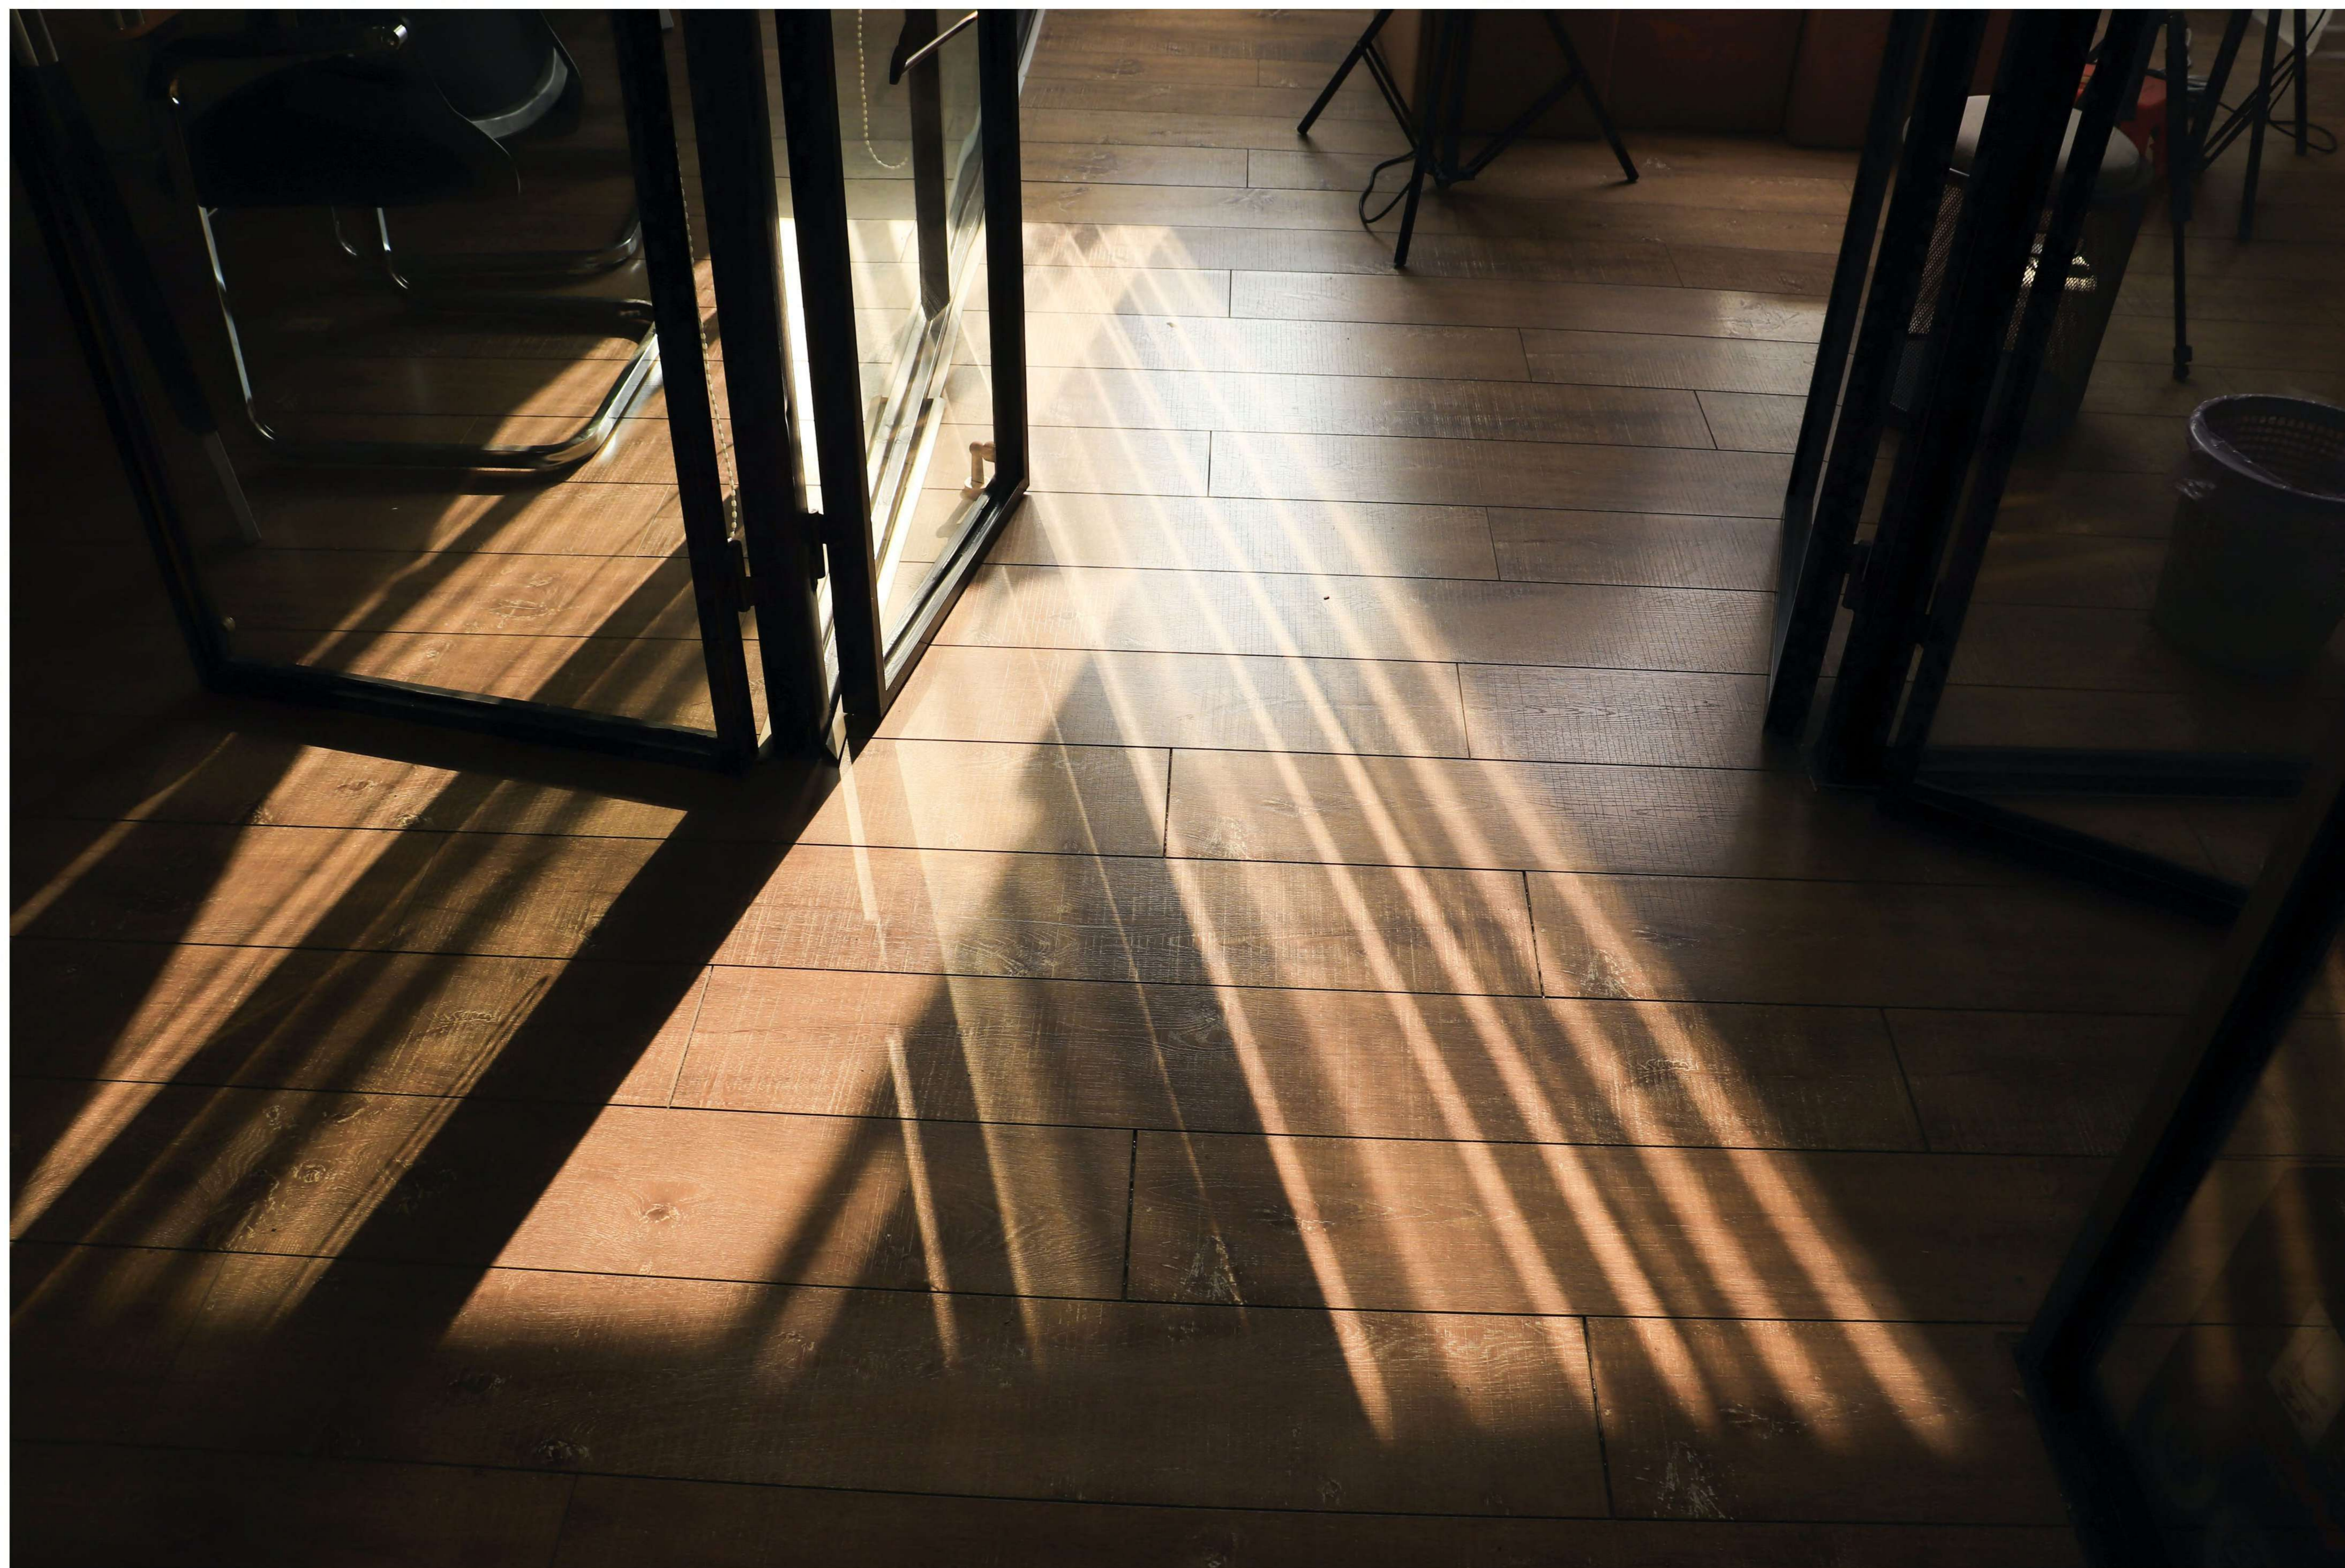

HABITAT  
STONE PLASTIC COMPOSITE  
FLOORING



H A B I T A T

## HABITAT - SPC FLOORING

Our SPC Flooring is an engineered luxury vinyl that resembles the natural elegance of wood. Combining limestones and stabilisers to create an extremely durable core, it is far stronger than WPC floors and laminate flooring.

Plastizier free, using hot press technique and 100% PVC material ensures that the flooring will not shrink, chap or warp, or become rigid and feel like hardwood. Treating the flooring surface with a dual -PUR reinforcement not only improves the excellent wear-resistance performance, but also helps reduce bacteria and the passage of infection. This helps promote a fresh and healthy environment.

Style your home, work place, or any residential and commercial place with natural elegance of wood, using our designed UNILIN Click SPC flooring to give enduring flawless finish every time. With this, you won't need any adhesive tools or professional installation.

Our designed UNILIN click SPC flooring is far stronger than WPC floors and laminate flooring, it justifies the price as well! We not only build SPC flooring with high grade materials, but also resemble real natural patterns as diligently and as credibly as possible. It is also convenient to install on different type of floor base, either ceramic, concrete, or existing floor.



## PRODUCT ADVANTAGES

- Zero Formaldehyde emission
- Easy installation, 4 sides with click system, DIY
- Water-proof & anti-slip
- More stable, not easily deformed
- Scratch proof
- Negligible expansion and shrinkage rate

H a b i t a t

# Wheat White



HB10001

# Royal Oak



HB10002

H a b i t a t

# Slate Gray



HB10003



**Thickness**

5.0mm

**Wear Layer**

0.5mm

**Size**

1221mm x 180mm

**Density**

2000-2100kg/m<sup>3</sup>

**Feature**

Waterproof, Wear Resistant, Anti-slip, Moisture Proof, Soundproof, Anti-static

**Advantages**

Easy click system to install, Labor costs saving, Super stability, Eco friendly

**Warranty**

Residential 20 years  
Commercial 10 years

HB10004



HB10005




HB10006



HB10007



PRODUCT INFORMATION				
Habitat SPC Flooring				
Size	1221mm x 180mm x 5mm			
Overall Thickness	5mm			
Wear Layer Thickness	0.5mm			
Finish UV	Polyurethane/Anti-Bacterial Polyurethane			
System	Unilin Click System			
Maintenance	Refer Maintenance Sheet			
PACKAGING DETAILS				
10pcs/ box				
TEXTURE OPTIONS	Antique Wood, Registered in Embossed/ Random Embossed			
PERFORMANCE	EN Norms	Result	ASTM Norms	Result
Dimension Squareness and Straightness	EN 427	Squareness:0.18mm Straightness:0.07mm	/	/
Dimensional Stability and Curling	EN 434:1994	Stability:Pass 0.06% Curling:Pass 0.65mm	ASTM F1700:2004	PASS 0.013in/ft
Flexibility	/	/	ASTM F137:2008	Pass 100mm
Chemical Resistance	EN 423	Pass	ASTM F925	Pass
Resistant to Impact	/	/	ASTM F1265:2003A	Pass
Color Fastness to Artificial Light	EN 20105:B02 method A	Pass, >=Grade6	ASTM F1515	Pass
Residual Indentation after Static Loading	EN 433	Pass, 0.06mm	ASTM F970	Pass
Slip Resistance	EN 13893	Class DS	/	/
Behaviour to Fire	EN 13501-1	Bf1-S1	ASTM E648-10	Pass/Class 1
Smoke Density	/	/	ASTM E662	Pass, <=450
Wear Resistance	EN660-2:1999 /EN649-2011	Group T	/	/
Sound insulation material performance test	/	/	ASTM E492-2009 ASTM E90-2009	IIC=68 STC=73
Static Coefficient of Friction of Polish Coated Flooring Surfaces	/	/	ASTM D2047-11	Dry:0.38 Wet:0.8
Thermal Resistance	EN12664	Pass 0.12K/W	/	/
Certificates				
Floorscore Certificate 	Dibt Certificate 	CE Certificate 	Quality Management 	SGS Certificates 

## Application

Commercial and Residential areas

Homes, Hotels, Offices, Retail shops, Restaurants, Gyms, Schools, Library, Hospitals etc

